

# Descaling procedure B HW-serie (Coffee system)

**1.**

**RENEGITE 50g**

**BRAVILOR BONAMAT UN2967 SULPHAMIC ACID**

**Read the safety instructions.**

**2.**

**Dissolve 100 grams of Renegite in 0.75 litres of hand-warm water (approx. 40 °C). Stir the descaling solution, so that the agent is solved well.**

**3.**

**Place an empty filter pan (without filter paper) on the container.**

**4.**

**Place the spray head above the container.**

**5.**

**PIN code: Press 1x K, 3x N(↑↑↑), 1x M(↓) and 1x N(↑).**

**6.**

**Press key 'M'.**

**7.**

**Press key 'M'.**

**8.**

**Press key 'G' to start the descaling program.**

**9.**

**Press key 'L' to confirm.**

10.

The descaling symbol flashes. An audible signal sounds and the level blocks flash.

11.

Empty the container through the tap.

12.

The container is empty. Press key 'L'.

13.

The water tank is boiled dry. The water flows into the container.

14.

Caution: Hot water!

15.

The container is full.

16.






Empty the container through the tap.






17.






The container is empty. Press key 'L'.

18.

The machine is ready to add descaling solution.

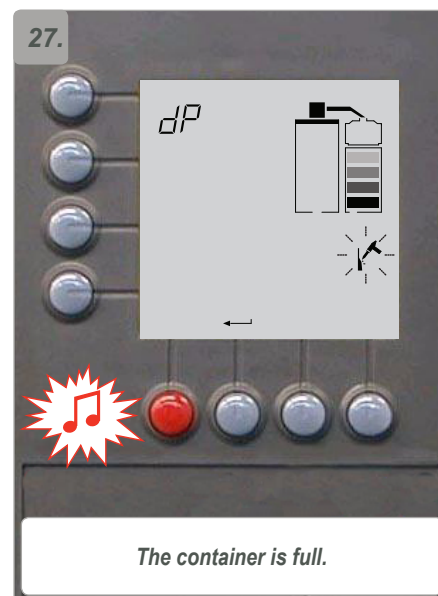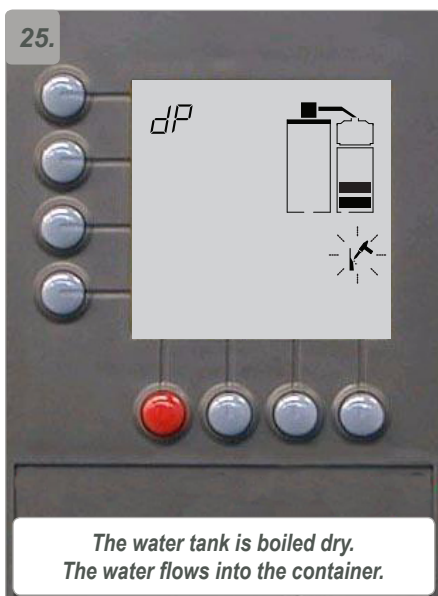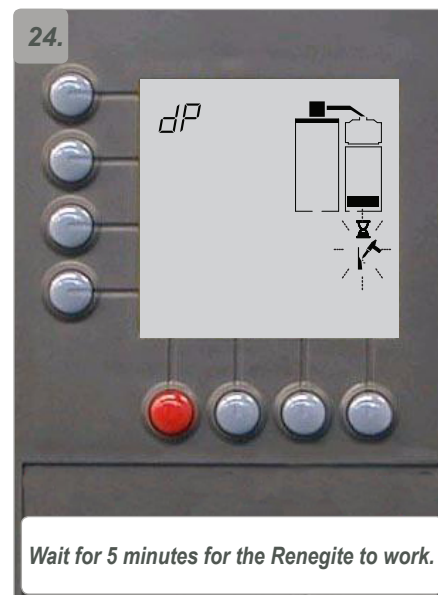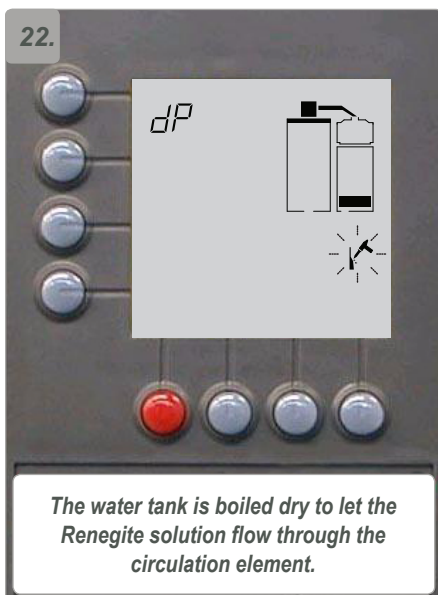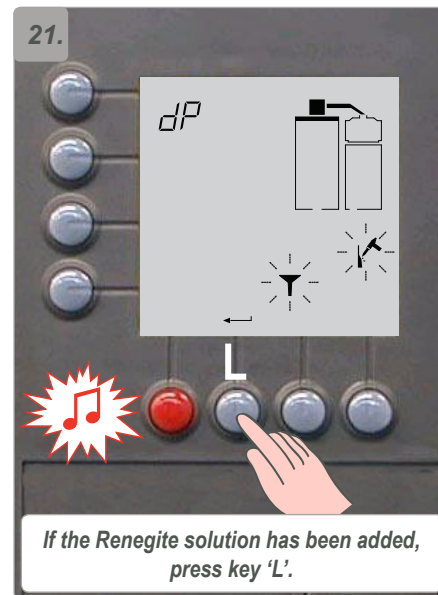

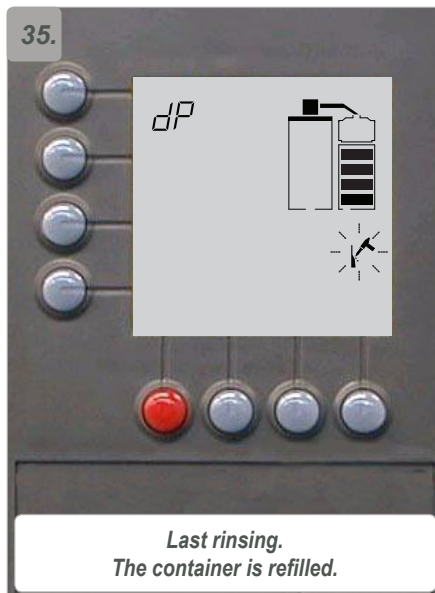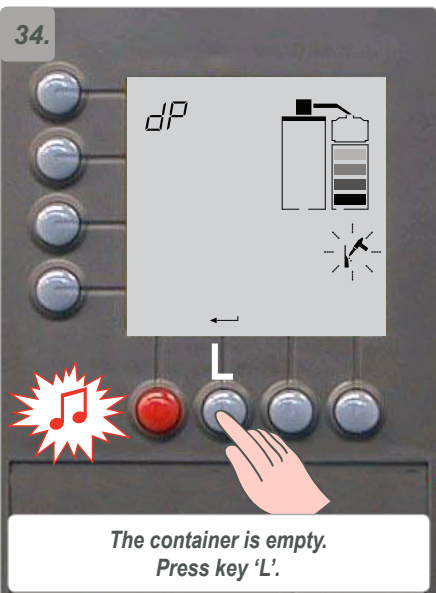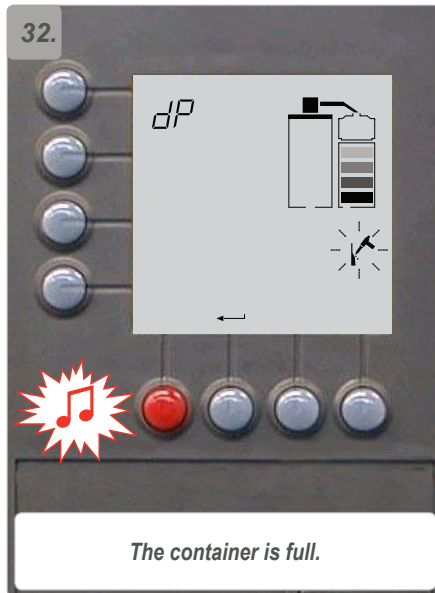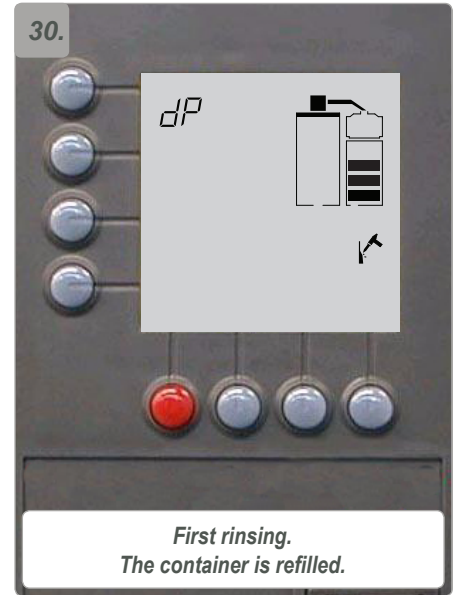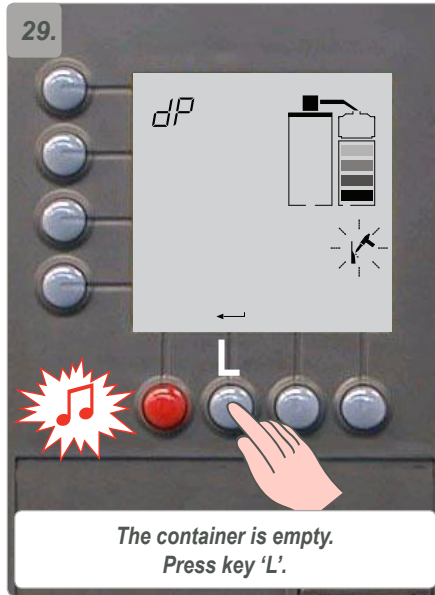

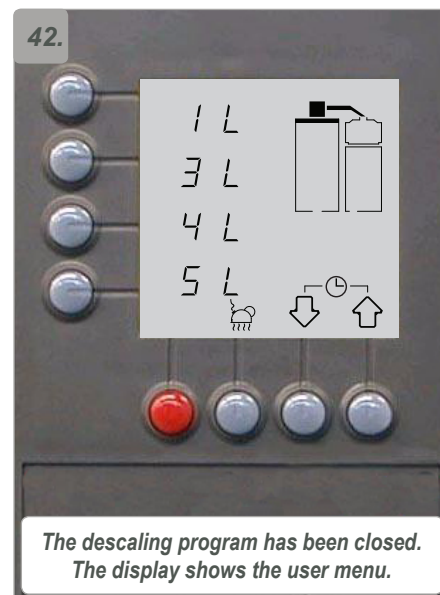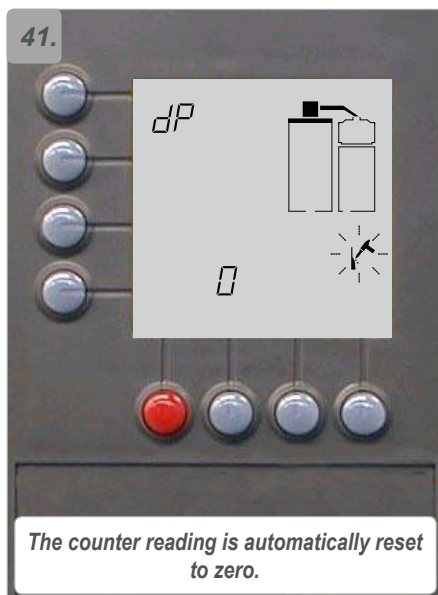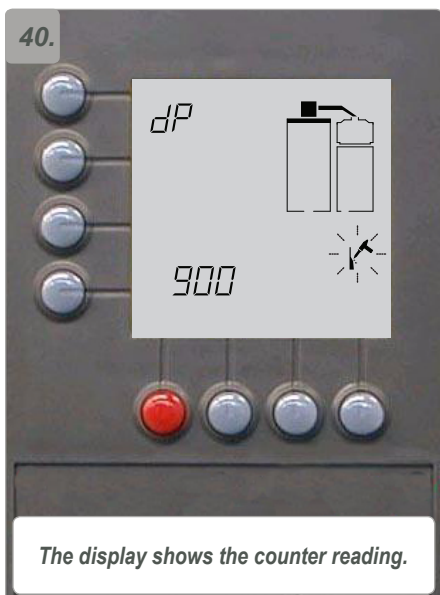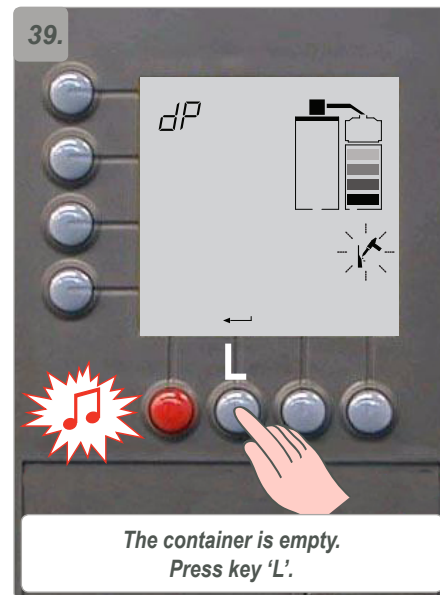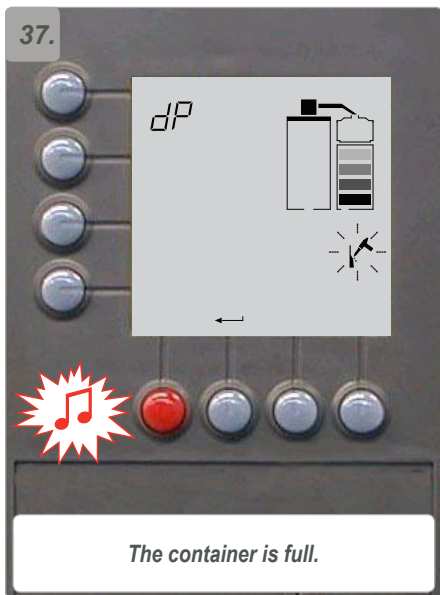

**Note:**  
Reference model B5 L/R